


This drawing is © Copyright of Etex Group. It must not be reproduced or altered in any part. This information is supplied in good faith but no liability can be accepted for any loss or damage resulting from use. Cedral and logos are trademarks of Etex NV or an affiliate thereof. Any use without authorisation is strictly prohibited and may violate trademark laws.

Drawing Title - Verge with Soffit
LR Breather Membrane Counter Battened

Breather membranes (Low Resistent) Must be counter battened as per requirements of BS 5250:2011, See BS 5534, S.R. 82:2017 for best code of practice

Cedral Slates - With (LR) Breather Membrane

Rev. ...

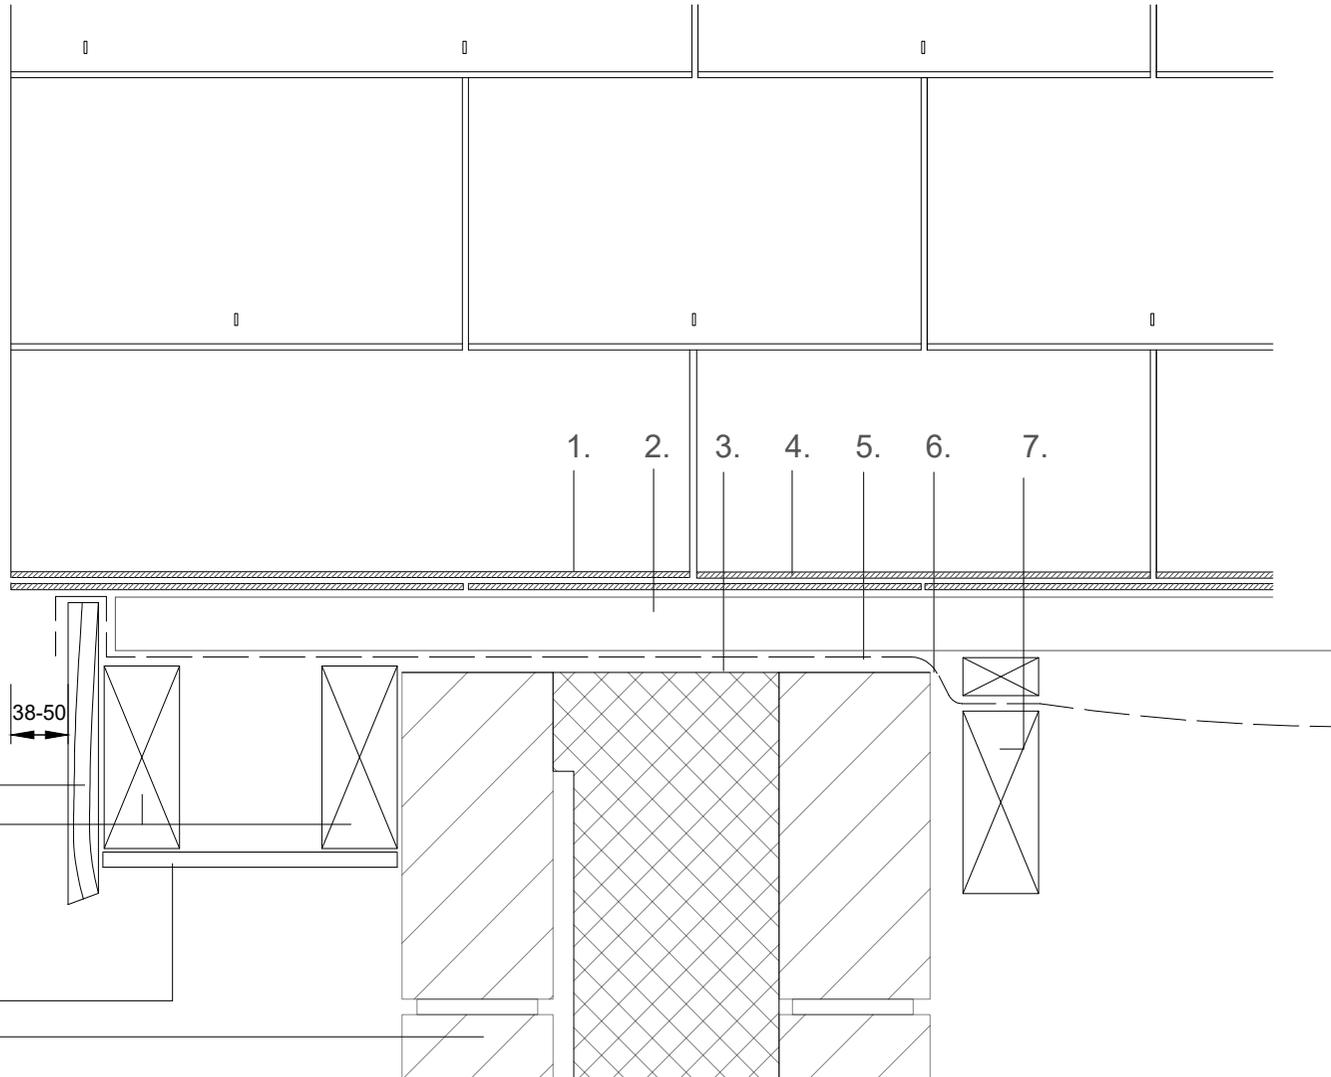

Notes and specifications.

1. Double width slate, (min. slate width 150mm)
2. Slating batten
3. Fire Batt Cavity Closer
4. Cedral Slates
5. LR Underlay dressed over the bargeboard
6. Counterbattens
7. Truss/Rafter
8. Bargeboard
9. Verge Ladder Frame
10. Barge Soffit
11. Cable Gable Wall

Slate overhang to be between 38 and 50mm.

Double-width slates to be used in each alternate slate course. Double-width verge slates to be fixed with 3 no. Tegral copper nails and 2 no. Tegral copper crampions.