


CEDRAL SUPERCEM FIBRE CEMENT SLATE

Product Data Sheet

Cedral Supercem is our economy roof slate product, perfect for housing developments and renovations. They are available in 600mm x 300mm and are rectangular in shape. Supercem slates are deep black in colour and have a smooth finish. They come with a 10-year colour guarantee and a 30-year structural guarantee.

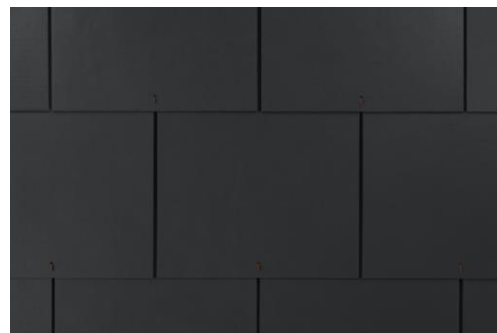

TECHNICAL DATA

Size of Slate	600 x 300mm
Minimum Pitch	25° (110mm headlap)
Max Pitch	90°
Typical Headlaps	100, 110mm
Batten Gauge	245 – 250mm
Slate Thickness	4mm
Covering Capacity	13.4 slates/m ² (100mm headlap) 13.6 slates/m ² (110mm headlap)
Weight of Slating (approx)	20.4 kg/m ² (0.20 kN/m ²) at 100mm headlap 20.9 kg/m ² (0.20 kN/m ²) at 110mm headlap
Battens Required (net)	4.00 (net lin.m/m ²) at 100 mm headlap
Batten Size Recommended (fixed as per SR82 : 2017)	50 x 25mm for rafter supports not exceeding 400mm centres 50 x 35mm for rafter supports not exceeding 600mm centres
Fixings	Slate nails (30 x 2.65mm) Copper disc rivets (19mm dia. x 2mm stem)
Authority	EN 492

Specification: Cedral Supercem slates are manufactured to EN492, Type NT, 4.0mm thick Fibre Cement Slates in Ireland, with a nominal average density of 1970kg/m³. Supercem slates have a smooth surface with a square edge and are offered with a 10 year manufacturer's colour guarantee and a 30 year structural guarantee. Cedral, as part of Etex Ireland Ltd., is independently certified as meeting requirements of ISO 9001(Quality), ISO 14001 (Environment), ISO 45001 (Safety) and are rated "Excellent" in the BES 6001 Standard for Responsible Sourcing.

Environmental Product Declaration and Declaration of Performance available on cedral.ie

Publication Date : January 2021

For further information visit www.cedral.ie, call +353 (0)59 863 1316 or email our technical support department on info.ireland@cedral.world

CI/SfB | | (4-) | Nf9